


# TONGHAND® XS



Delivering unparalleled speed, precision, and performance, the TONGHAND® XS Exit-Side Wrench for Horizontal Directional Drilling is as safe as it is agile. TONGHAND® XS works with drill pipe and tooling in size ranges comparable to mini rigs.

- Mounts to any brand of excavator in the 14-18 metric ton class
- Patented TongVise™ easily makes and breaks joints with guaranteed precision up to 30,000 lb-ft of torque
- Works with reamers, adapter sub connections and all drill pipe connections ranging from 2.38-4.38 inches OD
- Roller Arms and shift function (5.5 inches either direction) thread and un-thread all connections 2.38-4.5 inches OD
- Gull wing design moves arms up to make and break reamers
- Can rotate pipe strings several joints long
- Load locking valves hold load securely, regardless of hydraulic pressure
- Requires auxiliary hydraulic circuit on excavator
- In-cab display allows operator to safely monitor and adjust all functions, working parameters, and hydraulic settings from inside the excavator
- Designed to meet ASME Below-The-Hook Lifting Standards, CE compliant and TUV tested

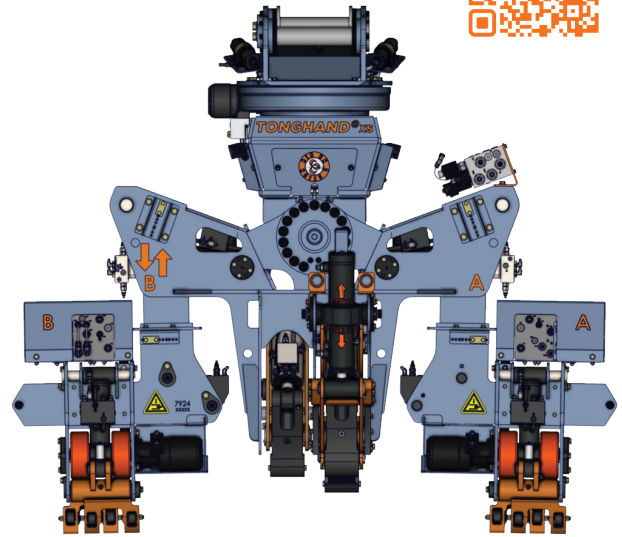

## TONGHAND® XS EXIT-SIDE WRENCH

Part Number	7955
Model Number	THXS
Excavator Wt Class	14-18 METRIC TON
Supply Pressure	3000 PSI / 207 BAR
Max Flow	30 GPM / 114 LPM
Min Flow	20 GPM / 76 LPM
Recommended Flow	25 GPM / 95 LPM
Capacity	5000 LBS / 2268 KGS
Weight	4672 LBS / 2119 KGS
Overall Dimensions	90L x 39W x 73H (IN) / 229L x 99W x 185H (CM)