


# PITPUMP™L

The toughest, most versatile mud pump ever designed for the horizontal directional drilling (HDD) industry. PITPUMP™L delivers unmatched power and efficiency in drill mud cycling.

- Advanced internal liquid-cooling system and high chrome alloy steel pump components (650+ Brinell) ensure industry leading service life.
- Specialized inlet and impeller design are built to handle particles up to 5" in diameter which reduces frequency of cleaning.
- Reversible impeller direction allows operator to clear lodged particles.
- Active health monitoring of critical components automatically notifies operator of needed maintenance which prevents unplanned downtime.
- Variable pump speed enables pump flow to be optimized based on flow requirements for maximum efficiency.
- Critical data including power level, cycle logging, pump temperature, coolant temperature, pump motor RPM and fuel level are monitored and clearly displayed for operator.

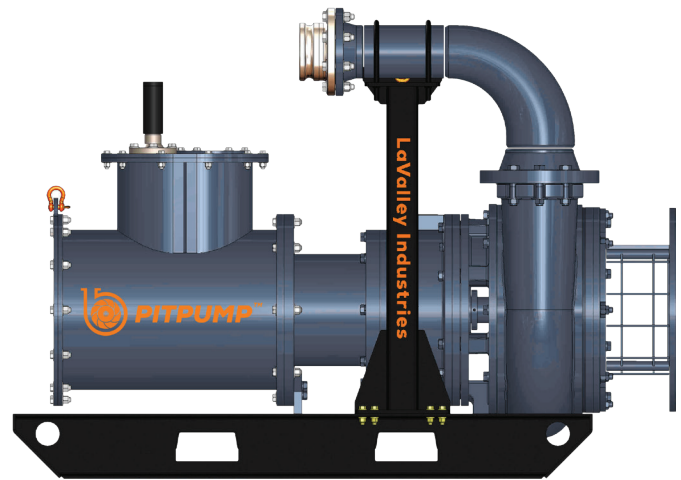

## PITPUMP™L SLURRY PUMP

Part number	7732
Peak flow (gpm/lpm)	1400 GPM / 5300 LPM
Discharge (in/mm)	6-8 IN / 152 MM
Particle size (in/mm)	5 IN / 127 MM
Pump speed	500-800 RPM
Coolant	Propylene Glycol/Water
Weight (lb/kg)	3750 LB / 1700 KG
Length (in/cm)	83 IN / 211 MM
Width (in/cm)	34 IN / 86 CM
Height (in/cm)	59 IN / 150 CM